FORESTRY LINE

MINI SSK

MULCHER FOR MINI LOADERS

Forestry mulcher ideal for cutting shrubs, brambles, and wood up to 15 cm. DCR rotor equipped with fixed tools type K. Suitable for compact and articulated mini loaders, ideal for work on uncultivated land, undergrowth, and green areas in general.

MODEL	M-SSK 50	M-SSK 70	M-SSK 90	M-SSK 110
Code	818050	818070	818090	818110
Cutting width (cm) ref. A	51	71	90	110
Total width (cm) ref. B	85	105	111	131
Total height (cm) ref. C	100	100	104	104
Total depth (cm) ref. E	96	96	123	123
Weight (kg)	290	325	395	435
Flow rate (L/min)	30-50	40-60	50-75	50-75
Required power (HP)	25-35	30-40	40-60	40-60
Max pressure (bar)	250	250	280	280
Number of belts	n.a.	n.a.	3	3
Number of tools	21	27	33	39
Rotor tube diameter (mm)	200	200	200	200
Total rotor diameter (mm)	360	360	360	360
Rotor RPM max	2800	2800	2700	2700

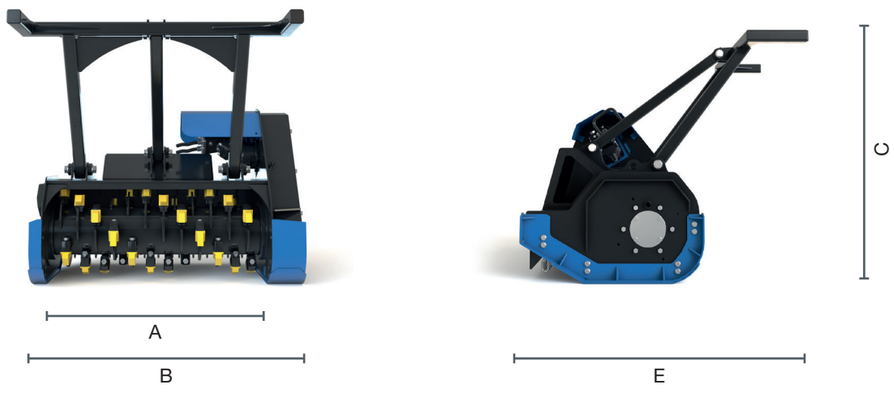

EQUIPMENT	STANDARD	OPTIONAL
Gear hydraulic motors 16cc or 20cc for model 50 with direct transmission to rotor	•	
Gear hydraulic motor gr. 3 22cc for model 70 with direct transmission to rotor	•	
Piston hydraulic motor 25cc or 34cc for models 90 and 110	•	
OSMA valve with 3 functions: anti-shock - anti-cavitation - flow limiter	•	
Belt transmission with 3 toothed belts for models 90 and 110	•	
Bearing with bronze cage	•	
Counter blades welded inside the frame	•	
Rotor made with 12.5 mm thick tube	•	
DCR bite limiter system with wear-resistant profiles in Hardox 450	•	
1.70 m hydraulic hoses with flat face couplings	•	
Inner frame plate in Hardox 400	•	
Skids with Hardox 400 plate	•	
Nitrogen accumulator with anti-shock function for pressure peak absorption	•	
Mechanical branch cutter	•	
WITHOUT FRONT HATCH on models 90 and 110	•	
MECHANICAL FRONT HATCH on models 90-110		•
Mounting plate for TORO-DINGO / VERMEER / DITCH-WITCH machines code 8850510		•
Mounting plate for CAST / AVANT / MULTIONE / CORMIDI machines code 8850511		•
Universal BOBCAT mounting plate code 8850512		•

MAIN PARTS

Advanced rotor positioning relative to the machine body



Piston motor with OSMA 3F valve

Oversized bearing for exceptional performance

Compact structure and lightweight design for better usability

TOOL	CODE	DESCRIPTION
	ZPK280	Fixed teeth recommended for cutting grass and dense vegetation up to 12 cm. Rotor K1 plus

TOOL	CODE	DESCRIPTION
	ZPK278	Fixed teeth recommended for cutting wood and shrubs in rocky terrain up to 15 cm. Rotor K2

www.osmasas.com